


## NKS Series PE Foam Tape

NKS series PE foam tape consisting a PE foam backing on a release film coated with acrylic adhesive. which is viscoelastic in nature. This gives the foam energy absorbing and stress relaxing properties which provides these tapes with their unique characteristics. The acrylic chemistry provides outstanding durability performance.

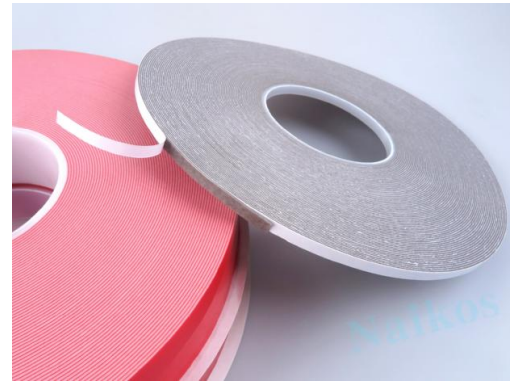

### Key Features:

- ★ Suitable for bonding material onto rough surfaces
- ★ Waterproof, sound and shake proof
- ★ UV resistance
- ★ Excellent adhesion to metal, plastic, wood, leather, paper which is hard to stick material


### Application Ideas:

- ★ Dustproof and airproof of glass curtain wall assembly
- ★ Building operations such as heat insulation, connection, bundling, amendment, sealing
- ★ Electronic,digital products assembly and processing
- ★ Automotive industry: nameplate, decoration bars, marks



### Product Construction:

- Red Film/White Paper →
- Pressure Sensitive Adhesive →
- PE Foam →
- Pressure Sensitive Adhesive →

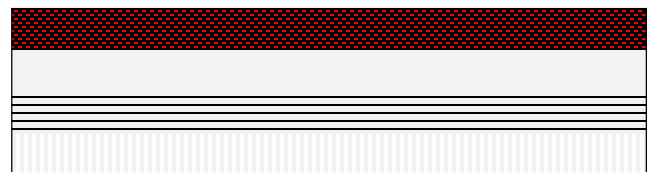



# 厦门奈克斯新材料有限公司

Naikos(Xiamen) Adhesive Tape Co.,Ltd.

## Physical Properties:

Item	NKS-1010CP#	NKS-1015P#	NKS-W1010P#
Color	White/Black	White/Black	White
Carrier	PE Foam	PE Foam	PE Foam
Adhesive	Pressure Sensitive Acrylic Adhesive	Pressure Sensitive Acrylic Adhesive	Rubber Adhesive
Total Thickness (mm)	0.4 - 3.0 (Custom Available)	0.4 - 3 (Custom Available)	0.4 - 3 (Custom Available)
Density( kg/m <sup>3</sup> )	100	67	100
Peel Adhesion (N/25mm)	≥20	≥20	≥20
Holding Power(Hr)	>24	>24	>24
Elongation at Break(%)	--	--	--
Temperature Resistance(°C)	-20°C-120°C	-20°C-120°C	-20°C-120°C
Width(mm)	4-1030 (Custom Available)	4-1030 (Custom Available)	4-1030 (Custom Available)
Standard Length(m)	300 (Custom Available)	300 (Custom Available)	300 (Custom Available)

Notice: The above were reference value. For detail information, please contact Naikos.

### Storage Conditions:

Store in a clean dry shady place. Temperature of 20 degrees Celcius and 65 percent relative humidity are recommended.

### Notice:

All physical properties, statements, and recommendations are based either on tests we believe to be reliable or our experience, but they are not guaranteed. Naikos recommends each user determine the suitability of the product for the intended purpose.

### Warranty and Limited Remedy:

THE FOLLOWING WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

Naikos warrants its tape will be free from defects in material and manufacturer. If a tape is proved to be defective, then the exclusive remedy, and Naikos' and seller's sole obligation shall be, at Naikos' option, to replace the quantity of the tape which is proved to be defective or to refund the purchase price.

### Limitations of Liability:

Except where prohibited by law, Naikos will not be liable for any loss or damage arising from the Naikos' product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

The forgoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of Naikos and seller.

## NAIKOS (XIAMEN) ADHESIVE TAPE CO.,LTD

Tel: +86-592-7152818

Fax: +86-592-7152858

Email: [info@xmns.com](mailto:info@xmns.com)

Web: [www.xmns.com](http://www.xmns.com) / [www.nkstape.com](http://www.nkstape.com)

Add: No.48, Huli Industrial Park, Meixi Street, Tong'an District, Xiamen City, Fujian, China